

SHAFT ASSEMBLY, HIGH SPEED REBOUND BLOW-OFF



Figure 1: HSRB Shaft Internals



Figure 2: HSRB Shaft Sweep Eyelet

Approved for use in the NASCAR Sprint Cup Series, the new PS-6020-HSRB shaft assembly allows teams to adjust their critical "zero point" settings extensively without adding bleed to the damper. It accomplishes this by means of a high-precision poppet and spring arrangement which exhausts into a low restriction bypass channel in the shaft. This allows zero point values to be swept in a single damper as the range of adjustment is extensive. What this means for the team is that their critical bump stop set-ups can be maintained and set once as dampers no longer need to be interchanged.

Additionally, the shaft used in the PS-6020-HSRB is the same component as the shaft used on the PS-6020-HSB (the compression blow-off shaft). This allows freedom and flexibility to reconfigure the shafts to work as either compression or rebound blow-off versions with changing of a few internals.

Specifications:

60 - 70 Clicks (Full Hard to Fully Open)

Shaft Lengths Available: 6", 7", 8", 9"

Eyelet Lengths Available: 1.6", 2.1"


PS-6020-HSRB.....
Shaft Assembly, 7300 High Speed Rebound Blow-off

The Competitive Advantage of Champions

Main Office
150 Franklin Street
Reading, PA 19602
Phone (610)375-6180
Fax (610)375-6190

Linear VDP Piston, Graph #1

Sample Build 1:
Piston: PI-VDPL55 (2°)
Rebound Stack:
1.350 x .012 x 2
1.350 x .010 x 2
1.350 x .008 x 2
.022 Preload (no inner
stack)
Compression Stack:
A+
Bleed: VW-135004-
1NT6

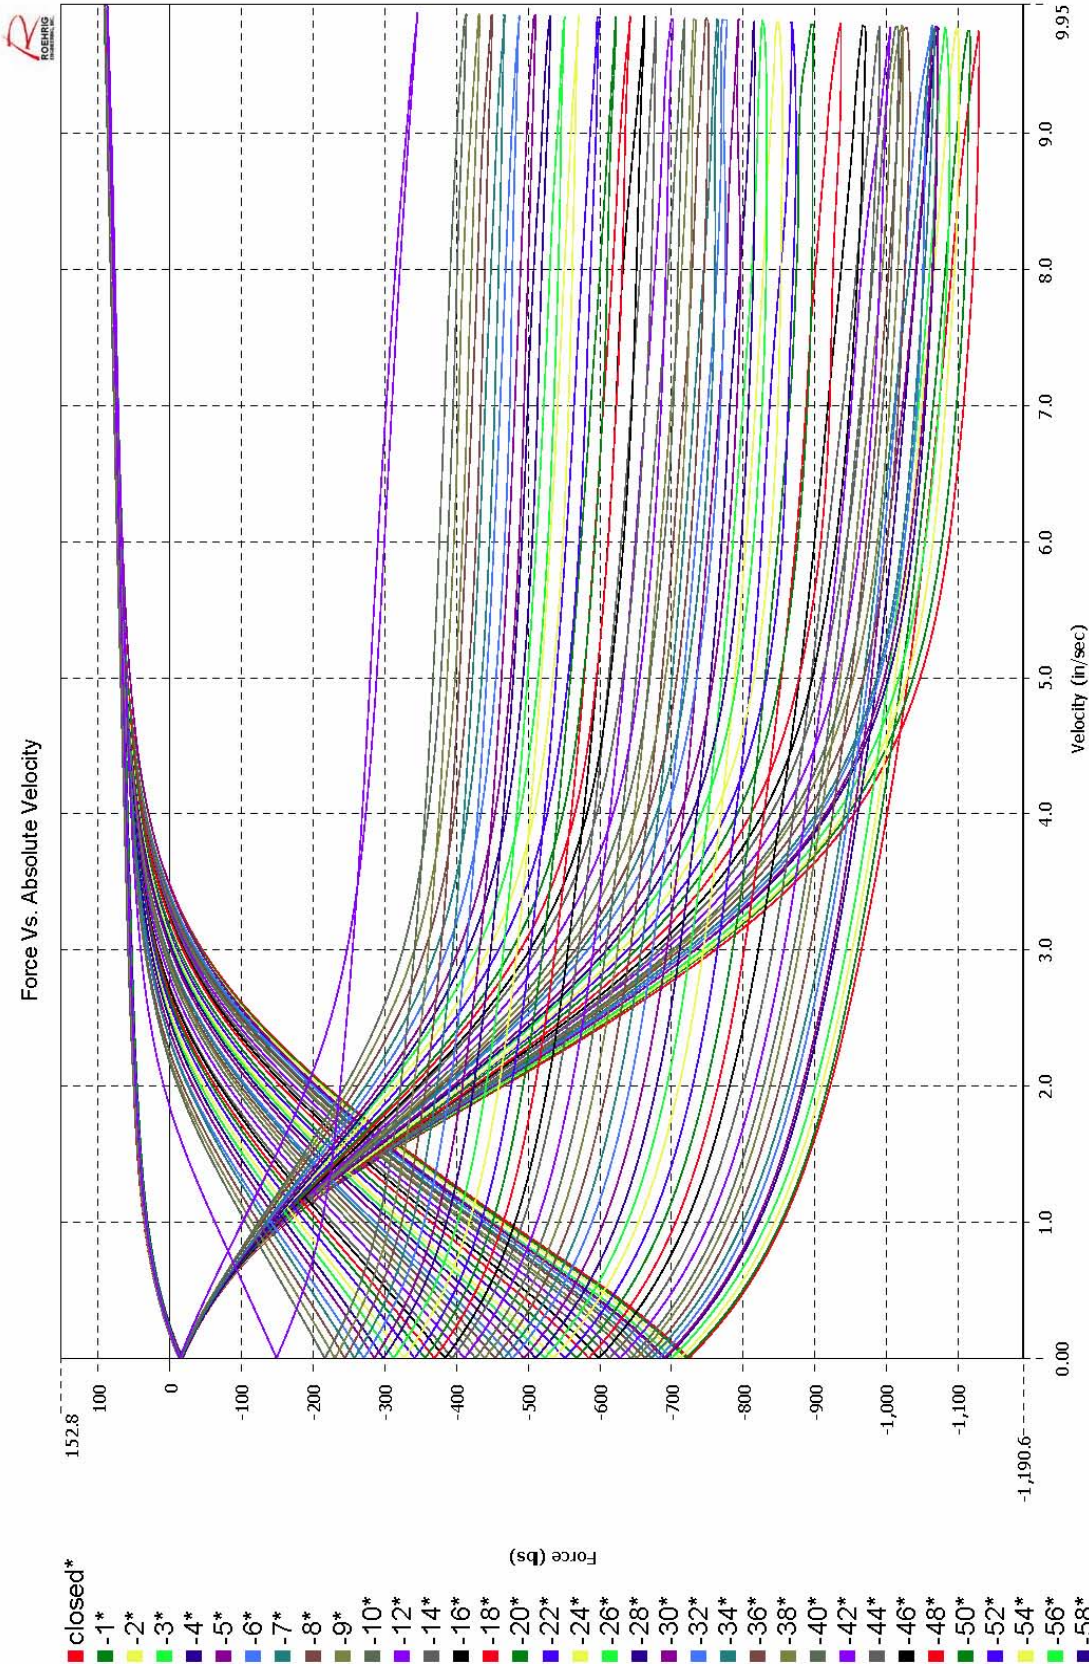

HSRBO SAMPLE RANGE
LVDP PISTON